

Application:

Oventrop compact distributor for the connection of the “Regumat” stations DN 25 (“Regumat” DN 32 with reducers).

Consisting of distributor and thermal insulation.

The distributor is, for instance, used for volume flow distribution from the heat generator to several heating circuits.

Advantages:

- space-saving installation
- simple installation
- problem-free water distribution even for small performance ranges

Models:

for 2 heating circuits
Wall bracket set

Item no.:

1351571
1351592

Materials:


Distributor: Bronze
Thermal insulation: Expanded polypropylene
Wall bracket: Steel, galvanised

Connections:


To heating circuit: G 1½ collar nut, flat sealing
To boiler: G 1½ male thread, flat sealing
End connection: G 1 female thread

Technical data:


Max. operating pressure: 4 bar
Max. operating temperature: 110 °C
Max. flow rate: 4 m³/h
Recommended application range: Max. 95 kW ($\Delta T = 20$ K)

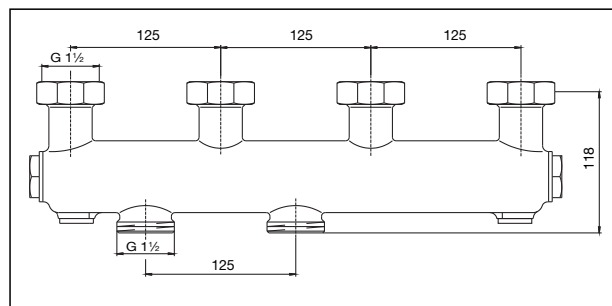

Dimensions distributor DN 25, 2-fold

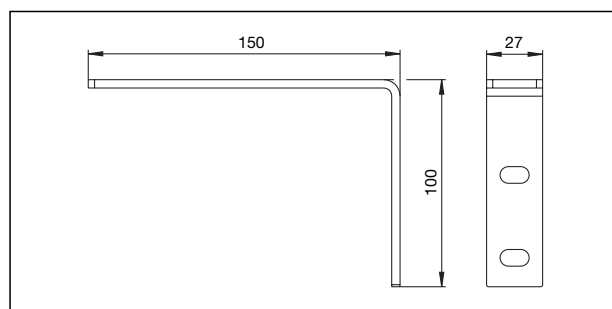

Dimensions wall bracket

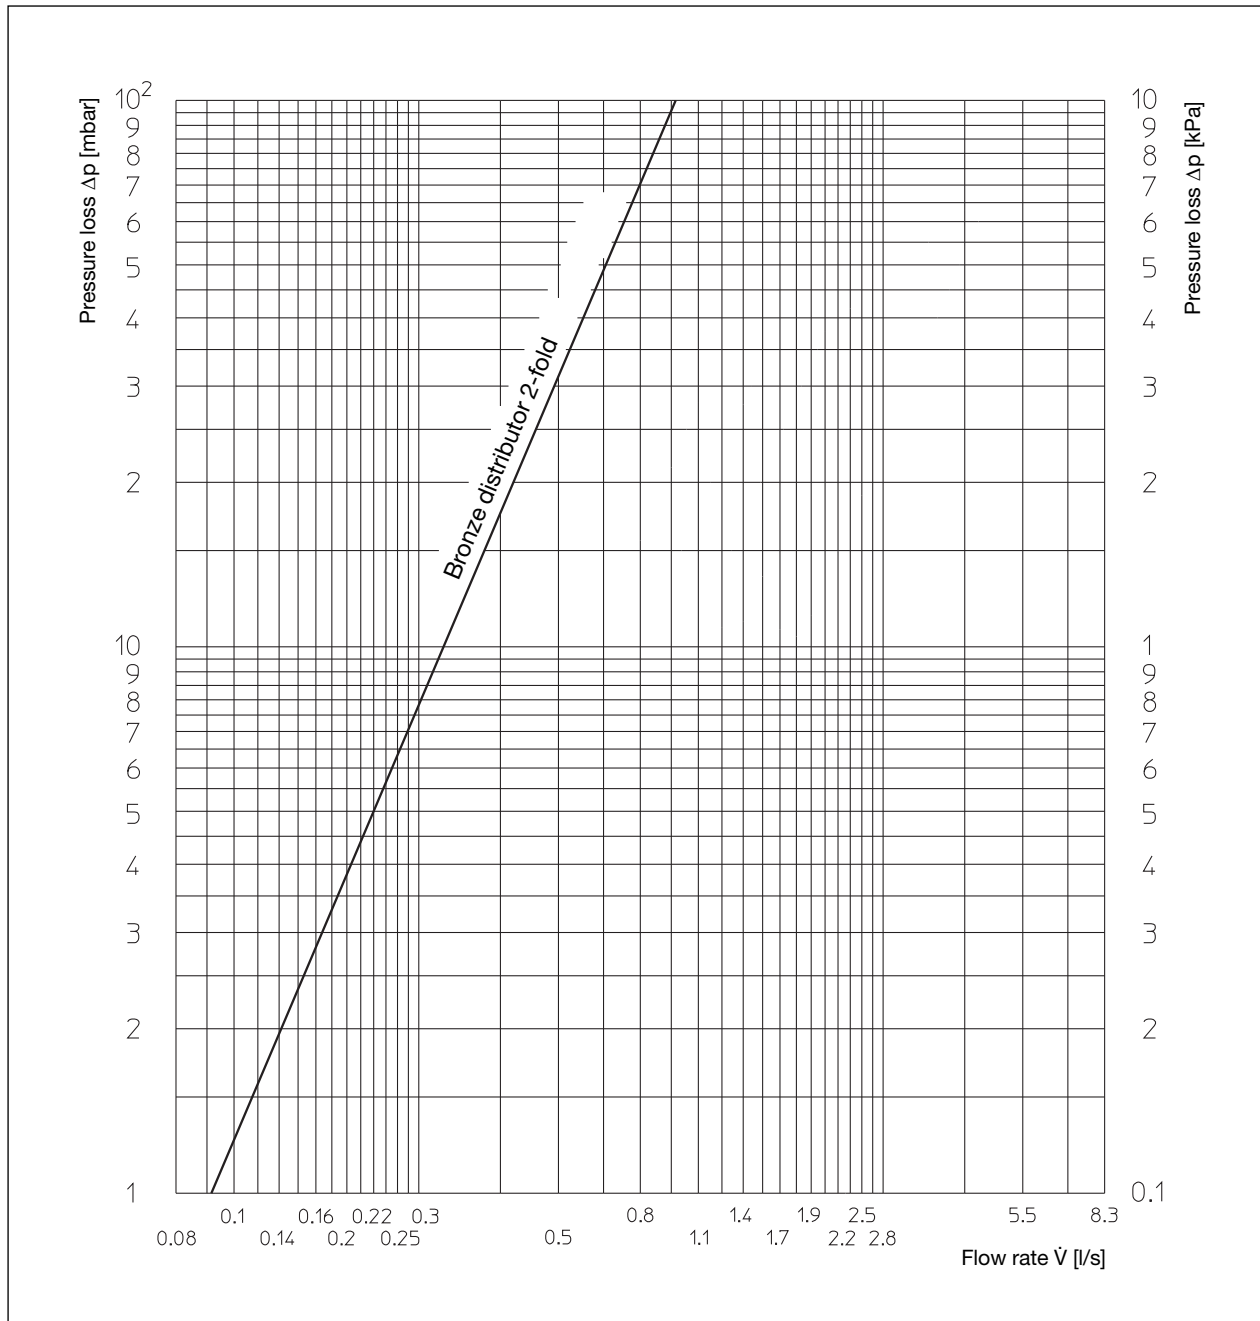

Flow chart



OVENTROP GmbH & Co. KG
 Paul-Oventrop-Straße 1
 D-59939 Olsberg, Germany
 Phone +49 (0)29 62 82-0
 Fax +49 (0)29 62 82-450
 E-Mail mail@oventrop.de
 Internet www.oventrop.de

For an overview of our global presence
 visit www.oventrop.de.

Subject to technical modification without notice.

Product range 6
 ti 254-EN/10/MW
 Edition 2015